



Corel


SIT65HVD232 3.3V power supply, high electrostatic protection, 1 Mbps high speed CAN bus transceiver

SIT65HVD232

characteristic:

- Powered by a single power supply of 3.3V;
- Comply with ISO 11898-2 standard;
- Total lead ESD protection exceeds ±16kV human model (HBM);
- Up to 120 nodes can be connected on a single bus;
- The adjustable driver conversion time can improve the radiation performance;
- Designed for data rates up to 1Mbps;
- Hot shutdown protection;
- Open circuit fault safety design;
- Non-scratch pulse power on and off protection for hot-swappable applications

Product appearance:

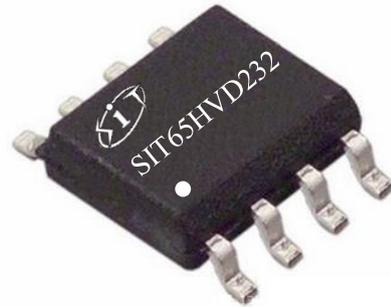


Provide green and lead-free packaging

description

SIT65HVD232 is an interface chip used between CAN protocol controllers and physical buses. It works with 3.3V microprocessors, microcontrollers (MCUs), and digital signal processors (DSPs) or equivalent protocol controllers equipped with CAN controllers. It is applied in industrial automation, control, sensor and drive systems, motor and robot control, building and temperature control, telecommunications and base station control, as well as status monitoring. It is suitable for applications that use the CAN serial communication physical layer compliant with ISO 11898 standards.

Parameter	Symbol	Test condition	Minimum	Maximum	Unit
Service voltage	V _{cc}		3	3.6	V
Peak transfer rate	1/t _{bit}	Non-zero code	1		Mbaud
CANH, CANL Input and output voltage	V _{can}		-16	+16	V
Total line differential voltage	V _{diff}		1.5	3.0	V
Ambient temperature	T _{amb}		-40	125	°C

Pin distribution diagram

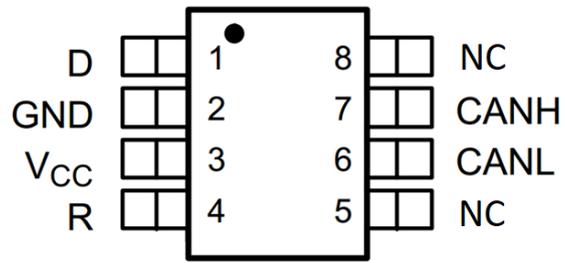



absolute rating

Parameter	Symbol	Big or small	Unit
Supply voltage	V_{CC}	-0.3~+6	V
MCU side port voltage	D, R	-0.5~ $V_{CC}+0.5$	V
Total input voltage on the bus	CANL, CANH	-18~18	V
6, Transient voltage at pin 7	V_{tr}	-25~+25	V
Receiver output current, I _O		-11~11	mA
Storage working temperature range		-40~150	°C
Ambient temperature		-40~125	°C
Welding temperature range		300	°C
Continuous power consumption	SOP8	400	mW
	DIP8	700	mW

The maximum limit parameter value is the value beyond which the device may suffer irrecoverable damage. Under these conditions, it is not conducive to the normal operation of the device. Continuous operation of the device at the maximum allowable rating may affect the reliability of the device. All voltage reference points are ground.

Pin definition

Pin number	Pin name	Pin function
1	D	CAN sends data input (low level in explicit bus state; high level in implicit bus state), also known as TXD, driver input
2	GND	Grounding connection
3	VCC	Transceiver 3.3V, power supply voltage
4	R	The CAN receives data output (low level in the explicit bus state; high level in the implicit bus state), also known as RXD, driver output
5	-	Not available
6	CANL	Low level CAN bus
7	CANH	High level CAN bus
8	-	Not available



Corel

SIT65HVD232
3.3V power supply, high electrostatic protection, 1Mbps
high speed CAN bus transceiver

DC characteristics of the total signal transmitter

Symbol	Parameter		Test condition	Minimum	Typical case	Maximum	Unit
$V_{O(D)}$	Output voltage (dominance)	CANH	$V_I=0V, R_L=60\Omega$ (See Figure 1 and Figure 2)	2.45		VCC	v
		CANL		0.5		1.25	
$V_{OD(D)}$	Differential output voltage (explicit)		$V_I = 0V, R_L = 60$ (see Figure 1)	1.5	2	3	v
			$V_I=0V, R_L=60, R_S=0V$ (see Figure 3)	1.2	2	3	v
$V_{O(R)}$	Output voltage (covert gender)	CANH	$V_I = 3V, R_L = 60$ (see Figure 1)		2.3		v
		CANL			2.3		
$V_{OD(R)}$	Differential output voltage (hidden)		$V_I=3V$	-0.12		0.012	v
			$V_I=3V, NO\ LOAD$	-0.5		0.05	v
I_{IH}	High voltage input current		$V_I=2V$	-30			μA
I_{IL}	Low voltage input current		$V_I=0.8V$	-30			μA
I_{OS}	Short circuit output current		CANH=-2V	-250			mA
			CANH=7V			1	
			CANL=-2V	-1			
			CANL=7V			250	
C_o	Output capacitance		See receiver				
I_{Cc}	Supply current		$V_I=0V$ (dominant), no load		10	17	mA
			$V_I=V_{CC}$ (heterozygous), no load		10	17	mA

(If not otherwise stated, VCC=3.3V±10%, Temp=TMIN-TMAX, typical value in VCC=+3.3V, Temp = 25)

General transmitter switch characteristics

Symbol	Parameter	Test condition	Minimum	Typical case	Maximum	Unit
t_{PLH}	Propagation delay (low to hi -	R = 0, i.e. short circuit (see Fi -		35	85	ns

	gh)	gure 4)			
		R=10 k Ω		70	125
		R=100 k Ω		500	870
t_{PHL}	Propagation de- lay (high to low)	R = 0, i.e. short circuit (see Fi- gure 4)		70	120
		R=10 k Ω		130	180
		R=100 k Ω		870	1200
t_{sk(p)}	Propagation de- lay symmetry (t _{PLH} - t _{PHL})	R = 0, i.e. short circuit (see Fi- gure 4)		35	
		R=10 k Ω		60	



Corel

SIT65HVD232
3.3V power supply, high electrostatic protection, 1 Mbps high speed CAN bus transceiver

		R=100 kΩ		370	
tr	Differential output rise time	R = 0, i.e. short circuit (see Figure 4)	25	50	100
		R=10 kΩ	80	120	160
		R=100 kΩ	600	800	1200
tf	Differential output fall time	R = 0, i.e. short circuit (see Figure 4)	40	55	80
		R=10 kΩ	80	125	150
		R=100 kΩ	600	825	1000

(If not otherwise stated, VCC=3.3V±10%, Temp=TMIN-TMAX, typical value in VCC=+3.3V, Temp = 25)

DC characteristics of the total signal receiver

Symbol	Parameter	Test condition	Minimum	Typical case	Maximum	Unit
V_{IT+}	Receiver is at threshold	See Table 1		750	900	mV
V_{IT-}	Receiver negative threshold	See Table 1	500	650		mV
V_{hys}	The lag range	V _{IT+} - V _{IT-}		100		mV
V_{OH}	High level output voltage	-6V<V _{ID} <500mV I _o = -8mA (see Figure 5)	2.4			V
V_{OL}	Low level output voltage	900mV<V _{ID} <6V I _o = 8mA (see Figure 5)			0.4	V
I_i	Total input current for the bus	V _{IH} =7V, VCC=0V	100		350	μA
I_i		V _{IH} =7V, VCC=3.3V	100		250	μA
I_i		V _{IH} =-2V, VCC=0V	-100		-20	μA
I_i		V _{IH} =-2V, VCC=3.3V	-200		-30	μA
R_i	Total input resistance of the bus	ISO 11898-2 corresponding standard	20	35	50	KΩ
R_{diff}	Differential input resistance	ISO 11898-2 corresponding standard	40		100	KΩ
C_i	Total input capacitance of the bus	ISO 11898-2 corresponding standard		40		pF
	Differential -					

C_{diff}	input capacitance	ISO 11898-2 corresponding standard		20		pF
------------	-------------------	------------------------------------	--	----	--	----



Corel

SIT65HVD232
3.3V power supply, high electrostatic protection, 1 Mbps high-speed CAN bus transceiver

I_{CC}	Supply current	See the driver				
----------	----------------	----------------	--	--	--	--

(If not otherwise stated, $V_{CC}=3.3V \pm 10\%$, $Temp=T_{MIN}-T_{MAX}$, typical value in $V_{CC}=+3.3V$, $Temp = 25$)

Total line receiver switch characteristics

Symbol	Parameter	Test condition	Minimum	Typical case	Maximum	Unit
t_{PLH}	Receiver transmission delay (low-high)	See Figure 6		35	50	ns
t_{PHL}	Receiver transmission delay (high-low)	See Figure 6		35	50	ns
t_{sk}	Pulse shift	$ t_{PHL} - t_{PLH} $			10	ns
t_r	Output signal rise time	See Figure 6		1.5		ns
t_f	Output signal fall time	See Figure 6		1.5		ns

(If not otherwise stated, $V_{CC}=3.3V \pm 10\%$, $Temp=T_{MIN}-T_{MAX}$, typical value in $V_{CC}=+3.3V$, $Temp = 25$)

Device switching characteristics

Symbol	Parameter	Test condition	Minimum	Typical case	Maximum	Unit
$t_{(LOOP1)}$	Loop delay 1, driver input to receiver output, implicit to explicit	R = 0, i.e. short circuit (see Figure 7)		70	115	ns
		R=10 k Ω		105	175	
		R=100 k Ω		535	920	
$t_{(LOOP2)}$	Loop delay 2, driver input to receiver output, explicit to implicit	R = 0, i.e. short circuit (see Figure 7)		100	135	ns
		R=10 k Ω		155	185	
		R=100 k Ω		830	990	

(If not otherwise stated, $V_{CC}=3.3V \pm 10\%$, $Temp=T_{MIN}-T_{MAX}$, typical value in $V_{CC}=+3.3V$, $Temp = 25$)

Over temperature protection

Symbol	Parameter	Test condition	Minimum	Typical case	Maximum	Unit
Overtemperature shutdown	$T_{j(sd)}$		155	165	180	$^{\circ}C$

(If not otherwise stated, $V_{CC}=3.3V \pm 10\%$, $Temp=T_{MIN}-T_{MAX}$, typical value in $V_{CC}=+3.3V$, $Temp = 25$)



supply current

Parameter	Symbol	Test condition	Minimum	Typical case	Maximum	Unit
Visible power consumption		$V_I=0V$, LOAD=60Ω		50	70	mA
Hidden power consumption		$V_I=VCC$, NO LOAD		6	10	mA

(If not otherwise stated, $VCC=3.3V \pm 10\%$, Temp=TMIN-TMAX, typical value in $VCC=+3.3V$, Temp = 25)

Function table

Table 1 Receiver characteristics in common mode mode ($V(RS)=1.2V$)

V_{IC}	V_{ID}	V_{CANH}	V_{CANL}	R OUTPUT	
-2 V	900mV	-1.55V	-2.45V	L	VOL
7 V	900mV	8.45V	6.55V	L	
1 V	6V	4V	-2V	L	
4 V	6V	7V	1V	L	
-2 V	500mV	-1.75V	-2.25V	H	VOH
7 V	500mV	7.25V	6.75V	H	
1 V	-6V	-2V	4V	H	
4 V	-6V	1V	7V	H	
X	X	Open	Open	H	

(1) H= high level; L= low level; X= not related



Table 2 Driver functions

Import D	Output		General vehicle status
	CANH	CANL	
L	H	L	Dominance
H	Z	Z	Covert gender
X	Z	Z	Covert gender

(1) H= high level; L= low level; Z= high resistance state

Table 3 Receiver functions

$V_{ID}=CANH-CANL$	R_S	Output R
$V_{ID} \geq 0.9V$	X	L
$0.5 < V_{ID} < 0.9V$	X	?
$V_{ID} \leq 0.5V$	X	H
Open	X	H

(2) H= high level; L= low level; ? = uncertain; X= not related



test circuit

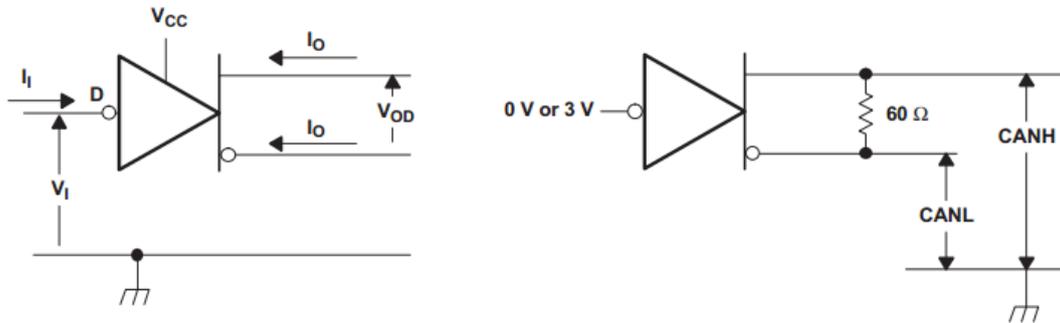


Figure 1 Definition of driver voltage and current test

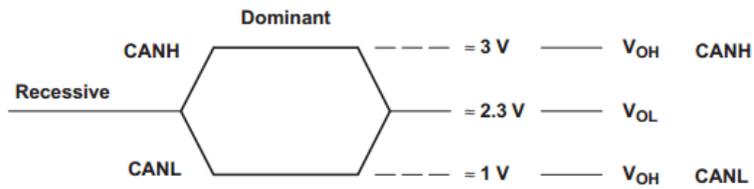


Figure 2 Bus Logic voltage definition


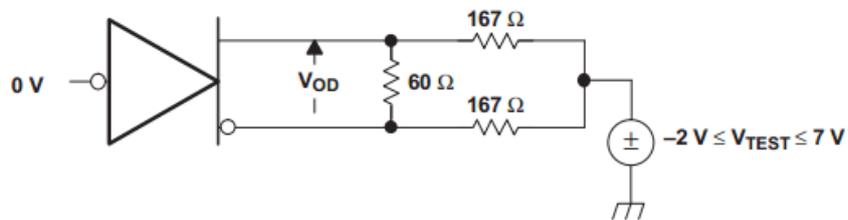


Figure 3 Driver VOD test circuit

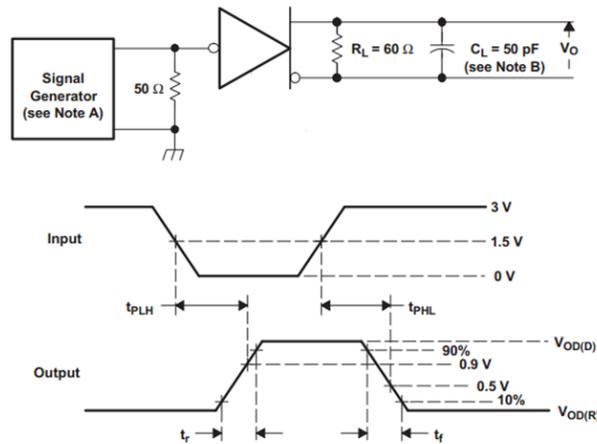

A. Characteristics of the input pulse generator: PRR is less than 500KHz, 50% duty cycle, $t_r < 6ns$, $t_f < 6ns$, $Z_o = 50$

B, C_L includes the instrument and fixed capacitor, with an error of less than 20%.

Figure 4 Driver test circuit and voltage waveform


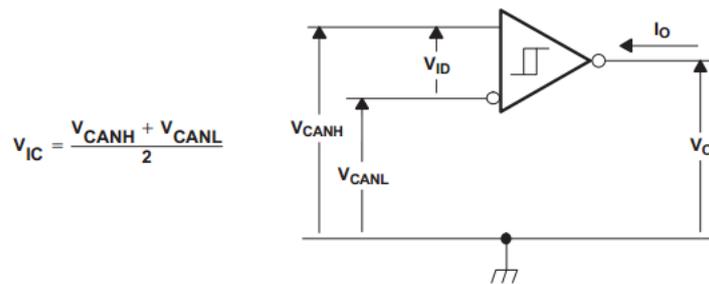




Figure 5 Receiver voltage and current definition

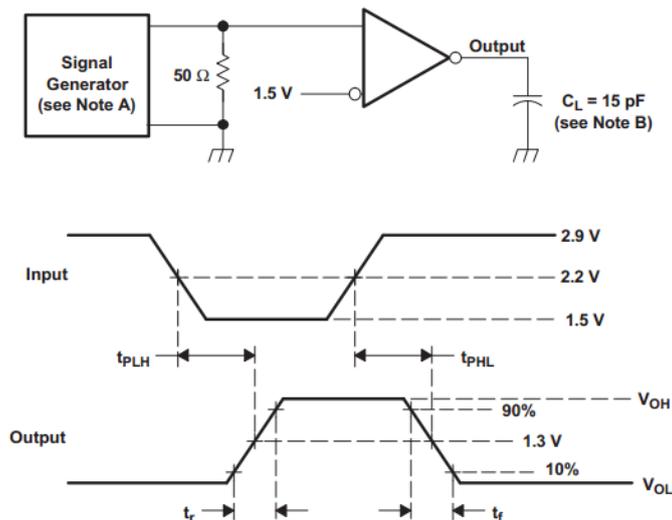

A. Characteristics of the input pulse generator: PRR is less than or equal to 500KHz, 50% duty cycle, $t_r < 6ns$, $t_f < 6ns$, $Z_o = 50$

B, C_L includes the instrument and fixed capacitor, with an error of less than 20%.

Figure 6 Receiver test circuit and voltage waveform

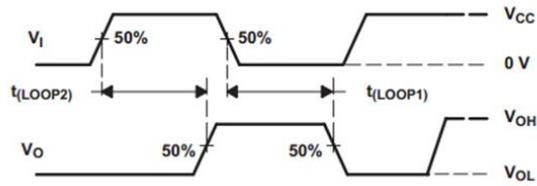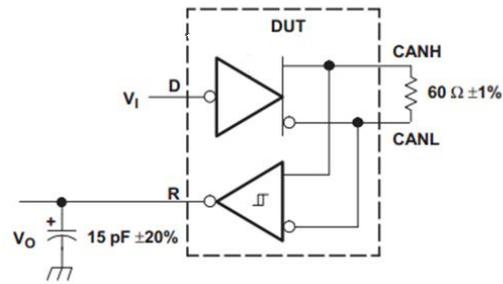

A. Characteristics of input pulse generator: PRR is less than or equal to 125KHz, 50% duty cycle, $t_r < 6ns$, $t_f < 6ns$, $Z_o = 50$

Figure 7 t (LOOP) test circuit and voltage waveform



explain

1 resume

SIT65HVD232 is an interface chip used between CAN protocol controllers and physical buses. When combined with 3.3V microprocessors, microcontrollers (MCUs), and digital signal processors (DSPs) or equivalent protocol controllers equipped with CAN controllers, it can be applied in industrial automation, control, sensor and drive systems, motor and robot control, building and temperature control, telecommunications and base station control, as well as status monitoring. It supports speeds up to 1Mbps and fully complies with the "ISO 11898" standard.

2 short-circuit protection

The drive level of SIT65HVD232 has a current limiting protection function to prevent the drive circuit from short-circuiting to the positive and negative power supply voltage. When a short circuit occurs, the power consumption will increase. The short circuit protection function can protect the drive level from damage.

3 Over temperature protection

SIT65HVD232 It has overtemperature protection function. When the junction temperature exceeds 160 , the current of the driver level will be reduced, because the driver tube is the main energy consuming component. The current reduction can reduce power consumption and thus reduce the chip temperature. At the same time, other parts of the chip still work normally.

4 Electrical transient protection

Electrical transients often occur in automotive applications, and SIT65HVD232's CANH and CANL have the function of preventing electrical transients from damaging.

5 control model

SIT65HVD232 Provide default working mode: high speed mode.




High speed operation mode is usually used in industrial applications. High speed mode allows the output to switch at as fast a speed as possible, and there are no internal limits on the rising and falling slopes of the output.



SOP8, external dimensions

Package size

Symbol	Least value /mm	Representative value /mm	Crest value /mm
A	1.50	1.60	1.70
A1	0.1	0.15	0.2
A2	1.35	1.45	1.55
b	0.355	0.400	0.455
D	4.800	4.900	5.00
E	3.780	3.880	3.980
E1	5.800	6.000	6.200
e		1.270BSC	
L	0.40	0.60	0.80
c	0.153	0.203	0.253
θ	-2°	-4°	-6°

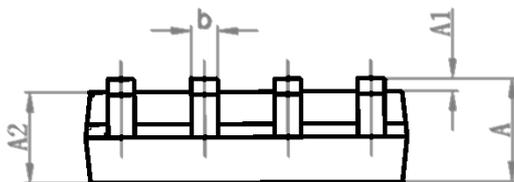
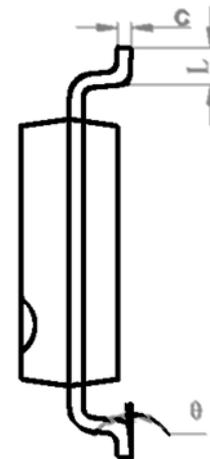
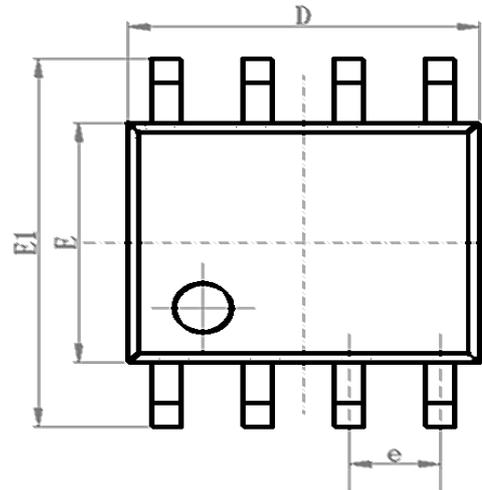




DIP8, external dimensions

Package size

Symbol	Least value /mm	Representative value /mm	Crest value /mm
A	9.00	9.20	9.40
A1	0.33	0.45	0.51
A2	2.54TYP		
A3	1.525TYP		
B	8.40	8.70	9.10
B1	6.20	6.40	6.60
B2	7.32	7.62	7.92
C	3.20	3.40	3.60
C1	0.50	0.60	0.80
C2	3.71	4.00	4.31
D	0.20	0.28	0.36
L	3.00	3.30	3.60

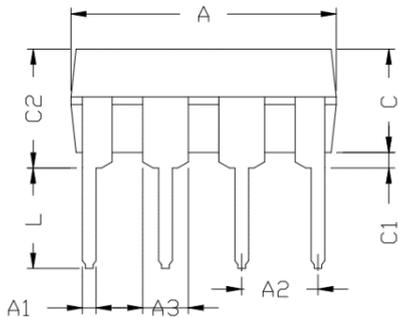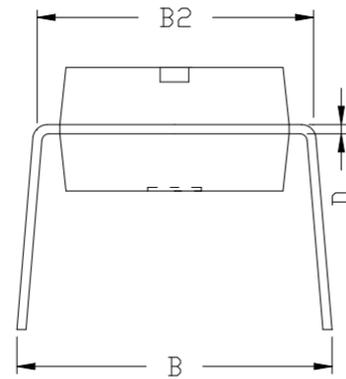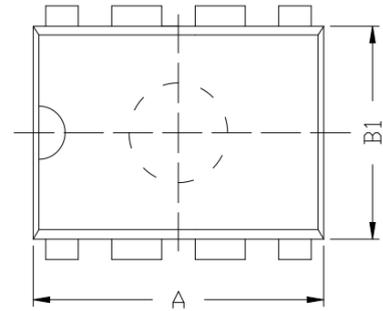

Order Information

Order code	Temperature	Package
SIT65HVD232DR	-40°C~125°C	SOP8
SIT65HVD232P	-40°C~125°C	DIP8

The tape packaging is 2500 beads per disc